

(12) AUSTRALIAN PATENT ABRIDGMENT

(19) AU

(11) AU-B-25946/84

(54) CONTROL SYSTEM FOR SEVERAL SLOT MACHINES

(71) KABUSHIKI KISHA UNIVERSAL

(21) 25946/84

542455

(22) 21.3.84

(24) 28.3.83

(31) 58-50505

(32) 26.3.83

(33) JP

(43) 4.10.84

(44) 21.2.85

(51) G07C 3/00

G07F 17/34

(72) K. UO OKADA

(74) J.A.

(56) 21573/83

G07F 17/34, G07C 11/00, H04B 9/00, 1/16

90596/82

536131

G07F 17/34

87544/82

539666

G07F 17/34

(57) Claim 1. A game machine control system for controlling a plurality of game machines, comprising:  
 a game machine control circuit provided in each game machine;  
 a device control circuit provided in each game machine for reading out data stored in the associated game machine control circuit;  
 an in-line control circuit for temporarily storing data read out by each device control circuit;  
 a computer for designating game machines for reading out data thereof, collecting the read-out data through said device control circuits and in-line control circuit and processing the collected data;  
 a memory for storing the processed data in said computer; and  
 means for providing the processed data.

542-55

COMMONWEALTH OF AUSTRALIA

Patents Act 1952

COMPLETE SPECIFICATION

(ORIGINAL)

Class

Int. Class

Application Number : 25946/84

Lodged :

Complete Specification Lodged :

Accepted :

Published :

Priorities :

Related Art :

Name of Applicant : KABUSHIKI KAISHA UNIVERSAL a Japanese Corporation

Address of Applicant : 561, Oaza Arai, Oyama-shi, Tochigi-ken, Japan

Actual Inventor : KAZUO OKADA

Address for Service : H.R. HODGKINSON & CO  
Patent and Trade Mark Attorneys  
26A Alfred Street  
MILSONS POINT NSW 2061

Complete Specification for the invention entitled:

"GAME MACHINE CONTROL SYSTEM"

The following statement is a full description of this invention including the best method of performing it known to us:-

The present invention relates to a game machine control system which is used for collecting from a plurality of game machines data concerning the operating status of these machines.

The game of a slot machine is started by inserting coin ( or token ), whereby a plurality of disposed reels are rotated altogether. The reels are stopped one after another when a predetermined period of time has passed or when a stop button is depressed. If the combination of displayed patterns of the stopped reels is a win combination, coins or tokens are paid back in number corresponding to the probability, with which the win combination will occur.

In a prior art slot game machine, the game is controlled by a microcomputer which is provided in the game machine body. In some game machines, data concerning the number of inserted coins, number of paid-back coins, number of games played, etc. are produced using a microcomputer, the produced data being displayed on a numerical display which is provided in the game machine body.

In the slot game machine including microcomputer noted above, the produced data is collected at a determined interval. However, the data has to be collected by opening the door of each machine and

erving the numerical display, the way of data  
lection being thus very cumbersome.

The primary object of the invention  
o provide a game machine control system which  
readily collect operating status data from a  
ality of game machines.

The above object of the invention is  
ined by the provision of a computer, which is  
ected to a game machine control circuit provided  
ach game machine and collects the game machine  
The data obtained in the computer is read  
therefrom and processed, and the processed data  
tput from an output unit. In this way, data  
individual game machines can be readily collected.

Additionally, if a trouble detection program is  
ed in the computer, such data as the machine  
r of a machine in trouble, spot of trouble, etc.  
e displayed on a display unit such as a CRT.  
er, in the event of occurrence of a trouble  
game machine, the operation of the machine may  
hibited to avoid erroneous operation. Furthermore,  
game machine control circuit may be controlled  
as to increase or reduce the probability of  
rence of win pattern combinations.

The invention will now be described in  
ction with an embodiment thereof with reference  
accompanying drawing.

A plurality of slot game machines 1a to 1n schematically shown respectively including game machine control circuit 2a to 2n and device control circuits 3a to 3n. In this embodiment, a number of bits is allocated to each of the machines 1a to 1n consists of bits, so that up to 128 machines can be accommodated for control. Of course more machines can be accommodated for control by increasing the available bits. A microcomputer is commonly used as each of the game machine control circuits 2a to 2n, controlling the operation concerning the game such as the rotation of reels and paying of coins. In addition to the game operation control, the game machine control circuits 2a to 2n produce operating status data representing the number of games played, number of coins inserted, number of coins paid back, prevailing state of machine, i.e., whether the machine is being used for a game or not, etc., and store these data in memory. The device control circuits 3a to 3n perform the reading of data from the game machine control circuits 2a to 2n.

Data read out by the device control circuits 3a to 3n is supplied through an interface circuit 4 to in-line control circuit 5 and temporarily stored therein. The data stored in the in-line control circuit 5 is read into a computer 6. The computer processes the input data, e.g., accumulates it to

obtain daily, weekly and monthly data which are stored in a memory 7. The computer 6 desirably has graph producing functions.

The data stored in the memory 7 may be displayed on a display 8 such as a CRT or used to produce hard copy in a printer 9.

An example of operation according to the invention will now be described. The slot game machines 1a to 1n are allotted machine numbers, and the computer 6 sequentially designate the machine numbers in a time sharing manner, for instance. The designated machine numbers are temporarily stored in the in-line control circuit 5 to be fed through the interface circuit 4 to the individual device control circuits 3a to 3n. Each of the device control circuits 3a to 3n compares the sequentially input machine numbers to its own machine number and, when it detects a coincidence of numbers, reads out data stored in the associated game machine control circuit, e.g., 3a, and feed it through the interface circuit 4 to the in-line control circuit 5. The data supplied to the in-line control circuit 5 is temporarily stored herein and fed to the computer 6. The computer processes the input data. The result is stored in the memory 7 and, if necessary, is displayed on the display 8 or provided as hard copy from the printer 9.

The arrangement described above according to the invention can read out and process data representing the operating status of a plurality of machines, so that it can greatly save time and labor for the data collection.

The Claims defining this invention are as follows: -

1. A game machine control system for controlling a plurality of game machines, comprising :  
a game machine control circuit provided in each game machine ;

a device control circuit provided in each game machine, for reading out data stored in the associated game machine control circuit ;

an in-line control circuit for temporarily storing data read out by each device control circuit ;

a computer for designating game machines for reading out data thereof, collecting the read-out data through said device control circuits and in-line control circuit and processing the collected data ;

a memory for storing the processed data from said computer ; and

means for providing the processed data.

2. The game machine control system according to claim 1, wherein each said game machine control circuit is a microcomputer.

3. The game machine control circuit according to claim 1, wherein said processed data providing means is a printer for providing hard copy.

4. The game machine control system according to claim 1, wherein said processed data providing



eans is a display for providing soft copy.


Dated this 20th day of March 1984

KABUSHIKI KAISHA UNIVERSAL




BY:

Patent Attorney for the Applicant  
H.R. HODGKINSON & CO

25 946/B4

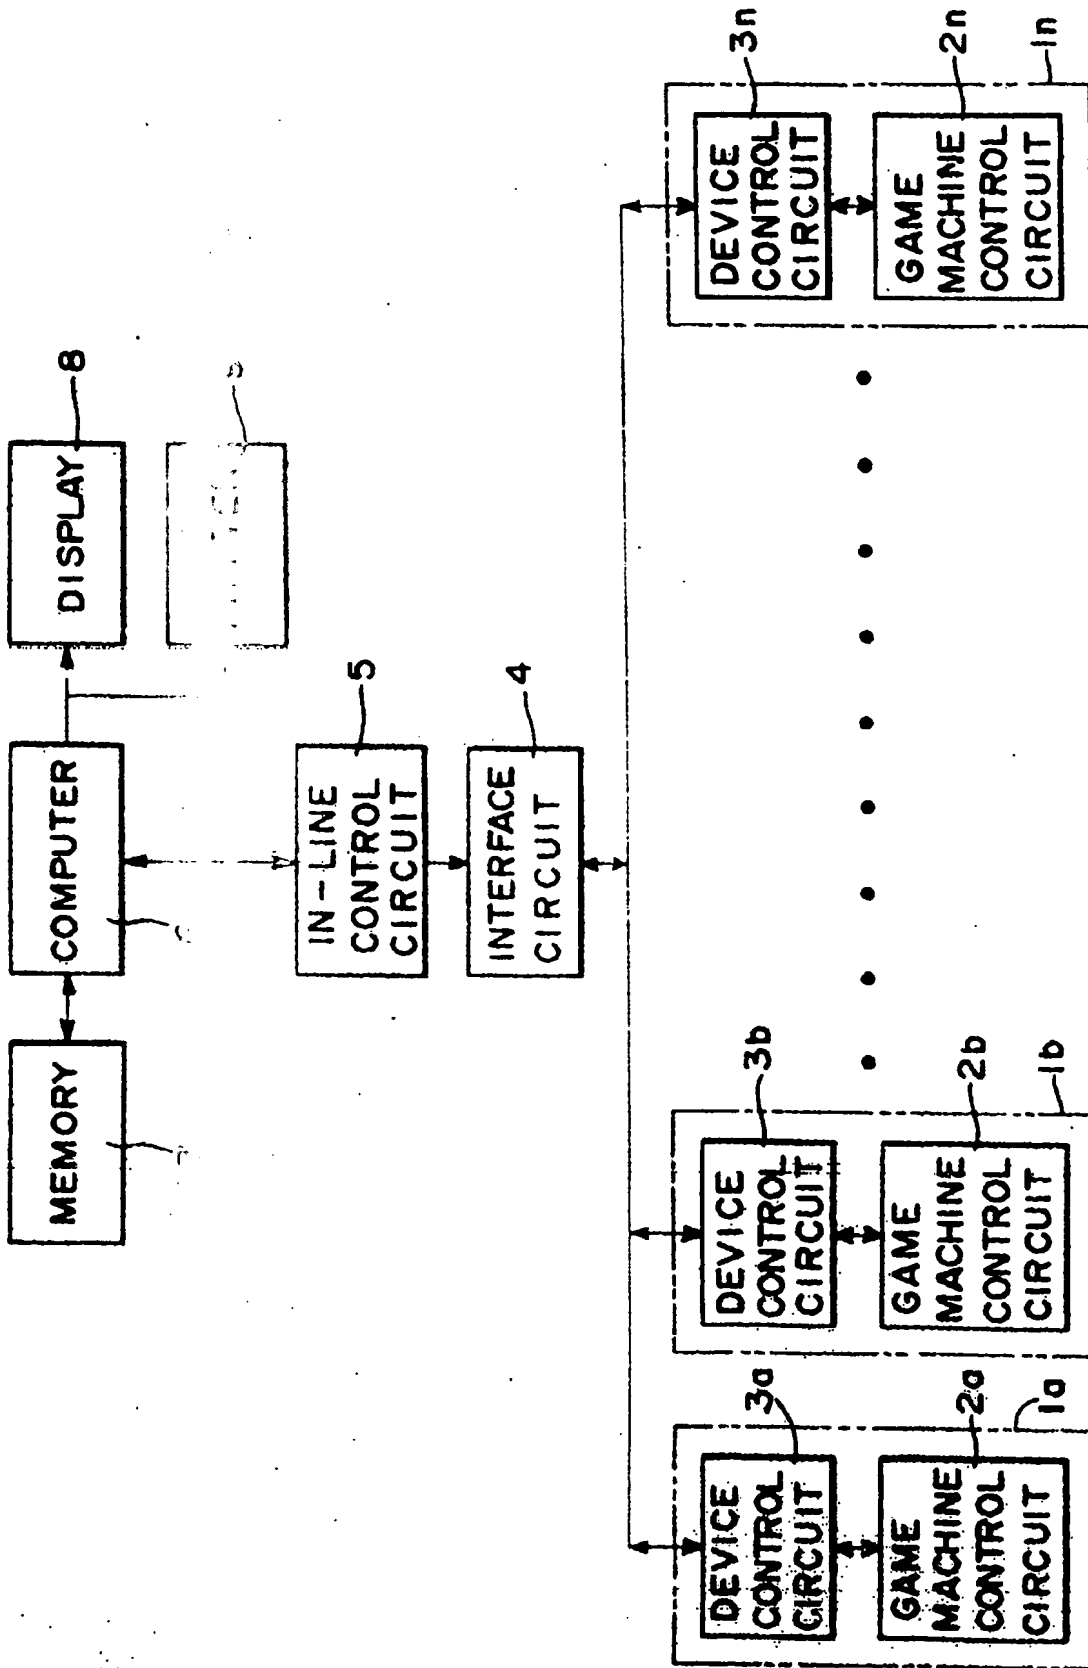

946/84

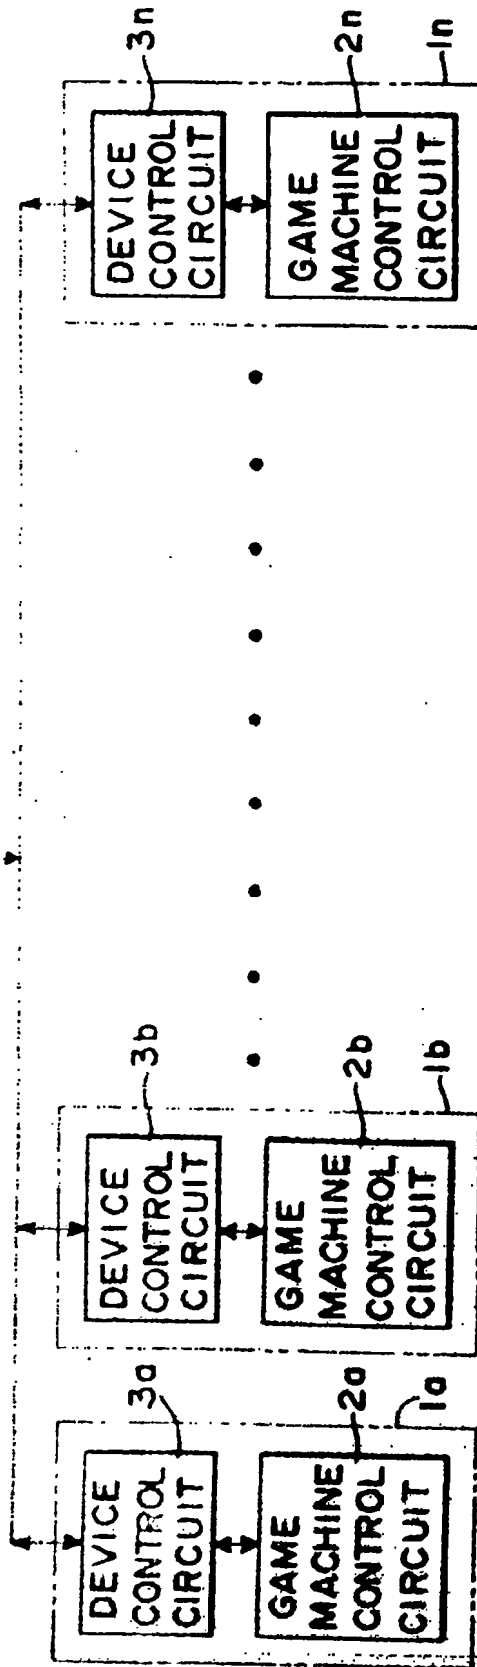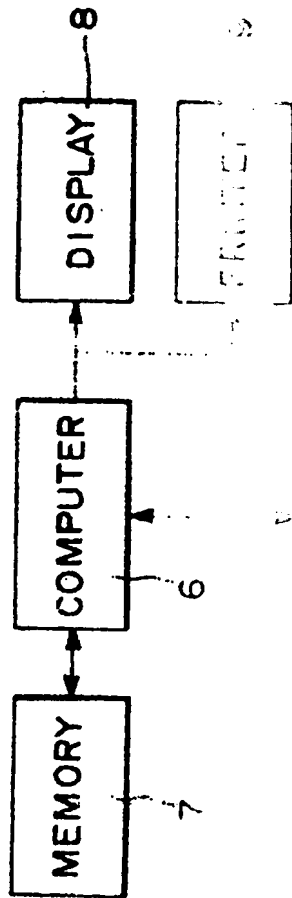

946/84